


# BARIX

## Exstreamer M400

Multiformat IP Audio Decoder.



The Exstreamer M400 feeds your PA and turns it into an extensive Audio over IP system. A wide variety of audio environments, such as Dante®, SIP, InformaCast and Syn-Apps are supported. Codecs include PCM, AACplus, MP3, OPUS, G.711, G.722 that can be streamed using HTTP and RTP. Audio files can be stored on the internal memory and their playback can be triggered via a simple UDP command. Thanks to the priority handler, the Exstreamer M400 can be configured to switch between sources according to one of the five priority settings and therefore eliminates the need for an audio matrix device. The M400 is a solid metal device, compact and easily installed. It is connected to your amplifier, DSP or audio mixer via a stereo output on RCA connectors. The configuration of the device is done via the local web interface.

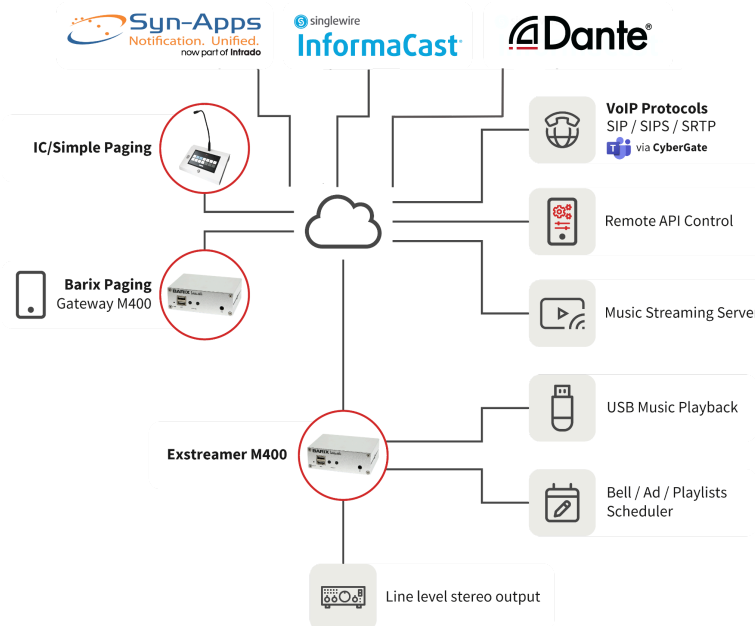

### Applications

- SIP and IP Paging / Notification
- Background music
- Emergency triggered message playout
- Dante® support - requires extra license
- Singlewire InformaCast integration
- Syn-Apps Revolution integration
- MS Teams endpoint via CyberGate service

### Features

- L-R Line Out on RCA Connectors (unbalanced)
- Singlewire certified
- Multi-level message priority
- AACplus, MP3, G.711, G.722 over RTP
- SIP VoIP endpoint support
- Storage of local audio files for triggered playout

# Technical Specifications

## Operation System

- Embedded Linux based on Yocto

## Network Interfaces

- 1 x Ethernet (RJ45) Interface
- IPv4, IPv6 capable
- 10/100 fdx/hdx, auto negotiation

## Protocols

- TCP/IP, UDP, RTP, SRTP SIP, SIPS, HTTP, HTTPS, DHCP, mDNS/DNS-SD (Avahi), NTP
- Dante® Support - Requires extra license
- Singlewire InformaCast compatibility
- Syn-Apps Revolution compatibility

## CPU / Memory

- Barix IPAM400 Processor Module
- Quad-Core ARM Cortex™ -A7
- 256MB DDR3 SDRAM
- 16MB SPI Flash
- 8GB SD-Card Flash

## Audio Formats

- MP3 CBR/VBR, up to 320 kbps, 8..48 kHz sample freq.
- AAC-HE (AAC, AAC plus, AAC plus V2)
- PCM linear 16bit @44.1 kHz
- G.711, G.722
- Opus, WAV, OGG Vorbis

## RS-232 Interface

- Serial Port

## Audio Interface

- unbalanced L-R Line level output on RCA connectors
- Headphone connector on the front panel

## User Interface

- Web interface for configuration
- 2 x Multicolor LED Status indicators
- Reset & Factory Defaults Button

## Power Requirements

- 5VDC, 10W maximum on 5.5x2.1mm barrel connector (inner positive)

## MTBF

- > 200'000h

## Measurement

- 108x38x78.7mm (4.25x1.5x3.1 inch)

## Weight

- 250g

## Warranty

Two years

## Environmental

### Operating Environment

0 to +50°C / 32 to 122°F

0 - 70% relative humidity, non-condensing

### Storage Conditions

-20 to +70°C / -4 to 158°F

0 - 70% relative humidity, non-condensing

### Certifications

CE, RoHS, FCC

2020.9295 Exstreamer M400 InformaCast EU  
2020.9296 Exstreamer M400 InformaCast US  
2020.9297 Exstreamer M400 InformaCast UK  
2020.9298 Exstreamer M400 InformaCast NoPSU  
2019.3160 InformaCast License

2023.9403P Exstreamer M400 EU Dante®  
2023.9404P Exstreamer M400 US Dante®  
2023.9405P Exstreamer M400 UK Dante®  
2023.9406P Exstreamer M400 Dante® NoPSU

023.9407P Exstreamer M400 EU Dante® + Informacast  
2023.9408P Exstreamer M400 US Dante® + Informacast  
2023.9409P Exstreamer M400 UK Dante® + Informacast  
2023.9410P Exstreamer M400 Dante® + InformaCast NoPSU

## Ordering Information

2020.9291 Exstreamer M400 EU (incl. Syn-Apps)  
2020.9292 Exstreamer M400 US (incl. Syn-Apps)  
2020.9293 Exstreamer M400 UK (incl. Syn-Apps)  
2020.9294 Exstreamer M400 NoPSU (incl. Syn-Apps)

### Barix AG

Limmatstrasse 21, 8005 Zürich, Switzerland  
Phone: +41 434 33 22 11  
[www.barix.com](http://www.barix.com)



© Barix AG 2021, all rights reserved. All information is subject to change without notice.

All mentioned trademarks belong to their respective owners and are used for reference only. Product Sheet V1.0

[Direct Link](#)



For commercial related questions (distributors contacts, price list, business opportunities)  
please contact: [sales@barix.com](mailto:sales@barix.com)



For technical inquiries (problem reports, request for documentation, etc.)  
please contact: [support@barix.com](mailto:support@barix.com)